

UNCLASSIFIED

AD 404 437

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION, ALEXANDRIA, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

404 437

AD No. . . .

ASTIA FILE COPY

404437

JPRS: 18,296

22 March 1963

OTS: 63-21391

FOR REFERENCE ONLY AT EACH OF THE
DDG OFFICES. THIS REPORT CANNOT
BE SATISFACTORILY REPRODUCED, DDG
DOES NOT FURNISH COPIES.

ABSTRACTS PERTAINING TO COMMUNIST CHINA

IN SOVIET ABSTRACTS JOURNALS

No. 48

(Electrical and Power Engineering Series)

ASTIA

APR 30 1963

TISIA

U. S. DEPARTMENT OF COMMERCE

OFFICE OF TECHNICAL SERVICES

JOINT PUBLICATIONS RESEARCH SERVICE

Building T-30

Ohio Dr. and Independence Ave., S.W.

Washington 25, D. C.

Price: \$.50

FOREWORD

This publication was prepared under contract for the Joint Publications Research Service as a translation or foreign-language research service to the various federal government departments.

The contents of this material in no way represent the policies, views or attitudes of the U. S. Government or of the parties to any distribution arrangement.

PROCUREMENT OF JPRS REPORTS

All JPRS reports may be ordered from the Office of Technical Services. Reports published prior to 1 February 1963 can be provided, for the most part, only in photocopy (xerox). Those published after 1 February 1963 will be provided in printed form.

Details on special subscription arrangements for JPRS social science reports will be provided upon request.

No cumulative subject index or catalog of all JPRS reports has been compiled.

All JPRS reports are listed in the Monthly Catalog of U. S. Government Publications, available on subscription at \$4.50 per year (\$6.00 foreign), including an annual index, from the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

All JPRS scientific and technical reports are cataloged and subject-indexed in Technical Translations, published semimonthly by the Office of Technical Services, and also available on subscription (\$12.00 per year domestic, \$16.00 foreign) from the Superintendent of Documents. Semiannual indexes to Technical Translations are available at additional cost.

JPRS: 18,296

ABSTRACTS PERTAINING TO COMMUNIST CHINA
IN SOVIET ABSTRACTS JOURNALS

No. 48

(Electrical and Power Engineering Series)

This serial publication contains translations of
abstracts pertaining to Communist China published in
Referativnyy Zhurnal, Elektrotehnika i Energetika
(Soviet Abstracts Journal, Electrical and Power
Engineering Series), Nos. 17, 20, 21 and 22, 1962.

Table of Contents

	<u>Page</u>
<u>No. 17, 1962</u>	
Thermal Power Engineering. Solar Power Engineering	1
<u>No. 20, 1962</u>	
Water and Wind Power Engineering	2
<u>No. 21, 1962</u>	
Electrical Equipment in Airplanes.....	3
<u>No. 22, 1962</u>	
High Voltage Technology.....	6

RZh Elektrotehnika i
Energetika 17-62

Abst #17D187

Electrical and Power
Engineering/ Thermal
Power Engineering/
Solar Power Engineering

KO Hsin-shih

"Investigation of Radiation Characteristics of Some Selective
Surfaces"

Teploenergetika (Thermal Power Engineering), No 4, 1962, pp 90-92

The results of experimental investigations of the radiation characteristics of selective radiation absorbing surfaces are given. The samples consisted of smoothly polished metal possessing a great reflecting capacity particularly for heat radiation, on which a film was placed. As a standard of a black body carbon black was used in the experiments and was placed on a dull, rough steel plate. Measurements were made at a temperature of $\sim 160^{\circ}$ C. In determining the coefficient of absorption of solar energy an instrument was used which was mounted on a heliostat which automatically followed the

Abst #17D187 (cont'd)

visible motion of the sun. The coefficient of absorption α and of emission of radiation ϵ increase with an increase of the thickness of the film, with ϵ growing considerably faster. Bibl. 10 titles. See also RZh E, 1962 13D223-- R. Koval'skiy.

RZh Elektrotehnika i
Energetika
20-62

Abst#20E13 Electrical Engineering
and Power Engineering/
Water Power Engineering
and Wind Engineering

CHOU, Chih-hao

Problem of the Economic Determination of a "Reduced" Provision in Water Power Engineering and Irrigation

Izvestiya vysshikh uchebnykh zavedeniy. Energetika [News of
Higher Educational Institutions. Power Engineering] 1962, No 2, pp
97-101

The method is expounded to obtain a "reduced" provision for a power controlled irrigation complex. Its basis is the economical demand for a minimum of labor expenditure. In order to compute the provision for irrigation one presumes the maximum general efficiency of the exploitation of the supplying source to obtain a definite guaranteed yield in years of drought. The equation is solved graphically. It is illustrated by an example. The determination of a computed provision for the irrigation systems expounded is sufficiently high. The

Abst#20E13 (cont'd)

"reduced" provision is determined by the minimum of the curve which represents the relation of the additional summary to the computed expenditures and the provision. Bibl. 8 titles.-- T. Zolotarev.

RZh Elektrotehnika i
Energetika 21-62

Abst #21188

Electrical and Power
Engineering/ Electric
Equipment in Transporta-
tion/ Electric Equipment
in Airplanes

BORISOV, K. N.
CHANG Kuan-jen

"Setting-Up the Characteristics of a Direct Current Motor with a Choke
Rotating Speed Control"

Trudy Moskovskogo aviatsionnogo instituta (Transactions of the Moscow
Aviation Institute), No 145, 1962, pp 41-45

A graphic method for determining the characteristics of a direct
current motor is discussed which will permit a visual presentation
and a correct selection of the operation of a magnetized choke in
regulating the speed of rotation. In analyzing such a system one
utilizes the well known family of curves for a choke which express the
function $U_{ch} = f(I_{ch}) = \gamma(I_{ch})$ at $L_{ch} = \text{const}$ with a superimposed

Abst #21188 (cont'd)

ellipse $-U_{ch} = f_1(I_{ch})$ at different currents of control (see
sketch). Assuming that the motor has only an active and the choke an
inductive resistance, the basic equation of the curve of constant
motor speed ($n = \text{const}$) is obtained:


$$\left(\frac{U_{ch}}{U_{net}}\right)^2 + \left(\frac{\frac{c}{r_m} + I_{ch}}{K_L U_{net}}\right)^2 = 1,$$

where U_{ch} is the phase voltage at the choke, U_{net} the phase voltage
of the network, c the counter electromotive force of the motor at
 $n = \text{const}$, r_m the internal resistance of the rotor, I_{ch} rotor
current, $K_L = \frac{U_{ch}}{U_{net}}$ the coefficient of reduction, U_{ch} the motor voltage,
 U_a the active voltage reduction, I_{ch} the current in the choke
winding. The obtained equation is one of an ellipse and establishes
relations among all the basic parameters. The semi-axes of the
ellipse are correspondingly equal to U_{net} and $K_L \frac{U_{net}}{r_m}$ (see sketch) and
do not depend upon the speed of rotation of the motor. The numerator
of the second member of the equation $\frac{c}{r_m} + I_{ch}$ shows that the ellipse
is in a general case unsymmetrical in regard to the axis of ordinates.
The asymmetry depends upon the rotary speed of the motor. The ellipse

Abst #21188 (cont'd)

is symmetrical only at $n = 0$ (curve 1). At other values of $n = \text{const}$ the ellipse has the former semi-axes but extends to the left of the initial position (curve 2). At U_{ch} and $n = n_0$ (ideal idle run of the motor) $I_m = 0$, and the whole ellipse is left of the ordinate axis touching it at the point of origin of coordinates (curve 3). The difference of the currents $I_m - I_m = \frac{I_m}{r_m}$ gives a section of the semi-axis of the ellipse lying left of the ordinate axis. This section is proportional to speed n which makes it possible to use the current axis of the ellipse as a scale for speed. For the practical construction of the motor's characteristics a model is made according to the above indicated formula at $n = 0$ at a scale of the curve family (see sketch, curve 1). On the horizontal (current) axis one plots at a scale of the rotary speed a uniform scale from $n = 0$ to $n = n_0$. In determining the rotary speed of the motor at any point the model is placed on the curve family shown in the sketch and by moving it left or right on the axis of the abscissas up to the intersection with the sought for point, one finds at the intersection of the axis of ordinates with the ellipse the rotary speed of the motor at this point. In using such a model it is possible to construct the

Abst #21188 (cont'd)

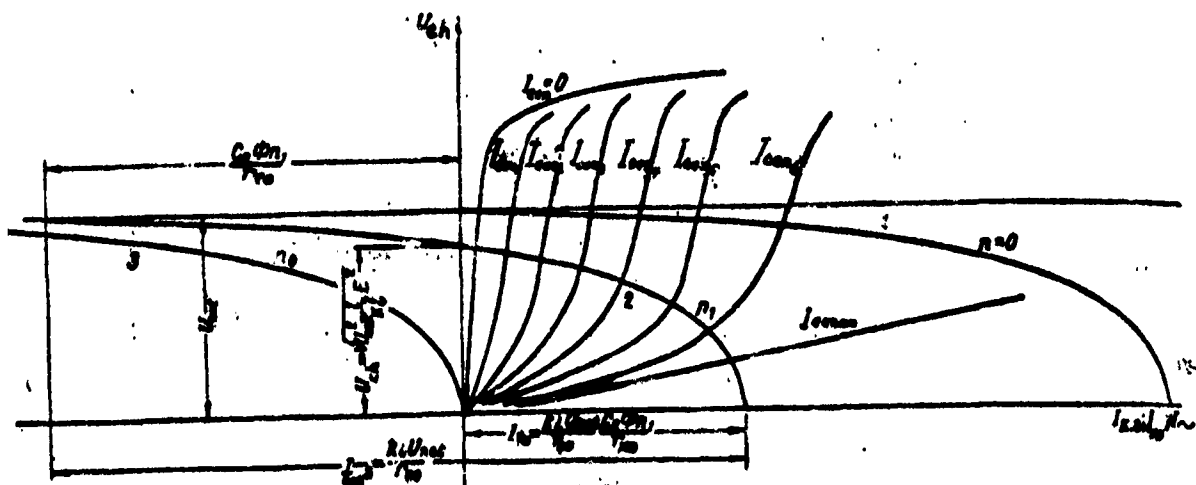

characteristics $I_m = f(I_m)$ at $n = \text{const}$ on the basis of which it is possible to construct the characteristics $n = f(I_m)$ at $I_m = \text{const}$.

Abst #21188 (cont'd)

If it is necessary to account for the valve resistance and for the active choke resistance, then in constructing the ellipse, one has to take instead of ζ a resistance that equals the sum of all resistances reduced to the rotor.6 ill.--K. Lebedeva.

Key to subscripts in text: ch = choke
 re = rotor
 con = control
 net = network
 i = inductive

RZh Elektronika i
Energetika
22-62

Abst#22F174 Electrical engineering and
Power Engineering/High Voltage
Technology

T'AN Tso-wu

Use of Metallic Thermoresistances for Self-Generated Overvoltage Protection

Elektroenergetika (Electrical Power Engineering) No. 5, 1962, pp 67-73

In order to restrict self-generated overvoltage to a value of 2.5 U₀ in lines of 400-500 kilovolt one employs surge diverters with semi-conductive "tervite" resistance (decreasing with temperature increase) and magnetic quenching of the arc. For that purpose it is expedient to have the operative resistance made of material with a positive temperature coefficient. At the beginning, as long as the thermal resistance has not reached a high temperature, the value of its resistance remains low, thus securing a low follow voltage. At the end of the disconnection process the thermal resistance reaches a high temperature thereby increasing its resistance that decreases the arising voltage.

This fact permits the surge diverter with thermal resistance to protect at lower insulation level than a surge diverter with a nonlinear "tervite".

Abst#22F174 (cont'd)

resistance or with a linear metallic resistance. Investigations have demonstrated that it is worthy of attention to employ in surge diverters thermal resistances as operative resistance. 5 ill, bibliography 4 items

P. Yurikov

E N D

2539; 2274
CSO: 3550-N